


CFBM(C) PUR 300/500V 4 × 0.5mm² + 4 × 2 × 0.14mm² + (4 × 0.14mm²) SHANGHAI HANKE WIRE

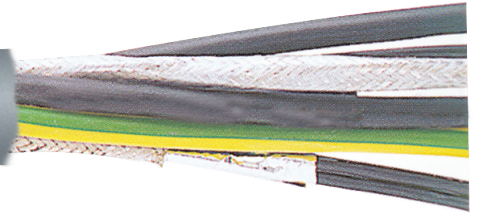

应用范围

适用于增量的编码器电缆、接线电缆用于转速传感器、刹车传感器、速度传感器。高软性拖链安装连接电缆。

APPLICATIONS

Highly flexible connection cables, suitable for wiring of incremental encoder, rotation speed sensor, brake sensor, speed sensor.

电线结构

多股细裸束绞铜丝或镀锡铜丝导体；
TPE或PP绝缘,编织屏蔽,PUR外护套；

WIRE MAKE-UP

Multi-stranded fine bare copper/tincopper conductor;
TPE/PP insulation, mesh shield, PUR outer sheath

技术参数

- ☒ 温度范围: -40°C ~ +80°C(固定) -25°C ~ +80°C(移动)
- ☒ 额定电压: U₀/U 300/300V
- ☒ 符合标准: VDE 0250/0281
- ☒ 导体标准: VDE0295/IEC 60228 6类
- ☒ 弯曲半径: 大于7 × 电线外径(固定安装)
大于20 × 电线外径(移动安装)

TECHNICAL DATA

- ☒ Operating Temp.:
-40°C ~ +80°C for fixed wiring
-25 ~ +80°C for movable wiring
- ☒ Rated Voltage: U₀/U 300/300V
- ☒ Governing Standards: VDE 0250/0281
- ☒ Conductor Standards: Category 6 in VDE 0295/IEC 60228
- ☒ Bending Radius:
more than 7 × wire O.D. (fixed wiring)
more than 20 × wire O.D. (movable wiring)

导体截面 Cross Section 芯数 × mm ² Core No. × mm ²	芯线颜色 Core wires color	护套颜色 Sheath color	标称外径 Wire O.D. mm	最大外径 Max. O.D. mm	近似重量 Weight Kg/Km
(4 × 0.5 + 4 × 2 × 0.14 + (4 × 0.14))	0.5: 白、兰、棕绿、白绿 4 × 2 × 0.14: 黄/紫、灰/粉红、棕/绿、红/黑 (4 × 0.14): 绿黑、兰黑、黄黑、红黑	黑	7.20	8.0	98.4
(2 × (0.5) + 3 × (2 × 0.14))	0.5: 黑、红 0.14: 黑/棕、红/橙、绿/黄	绿	7.83	8.7	83.2
(2 × 1.0 + 4 × 2 × 0.25)	1.0: 白、棕 0.25: 棕/绿、灰/粉红、兰/紫、红/黑	橙	7.92	8.8	88.0
(9 × 0.5)	白、棕、绿、黄、灰、粉红、兰、红、黑	橙	7.92	8.8	100
(2 × 0.5 + 10 × 0.14)	0.5: 白、棕 0.14: 白、棕、绿、黄、灰、粉红、兰、 红、黑、紫	橙	6.21	6.9	56.0
(2 × 2 × 0.18)	黑、红、橙、棕	绿	4.5	5.0	33.6
(4 × 2 × 0.18)	黑/棕、红/橙、绿/黄、兰/紫	绿		6.4	60.8
(8 × 2 × 0.18)	黑/棕、红/橙、黄/绿、兰/紫、灰/白 黑/白棕、白红/白橙、白绿/白黄	绿	7.92	8.8	105
(12 × 0.23)	黑、棕、红、橙、绿、黄、兰、紫、灰、白、白黑、白棕	绿	6.03	6.7	68.0
(4 × 0.5 + 4 × 2 × 0.14)	0.5: 白、兰、白绿、棕绿 0.14: 黄/紫、灰/粉红、白/绿、棕/绿	绿	7.2	8.0	72.0
(4 × 0.5 + 4 × 2 × 0.38)	0.5: 白兰、白黑、白红、白黄 0.38: 黑/棕、红/橙、绿/黄、兰/紫	绿	8.28	9.2	106
(2 × 0.5 + 3 × (2 × 0.14) + 4 × 0.23 + 4 × 0.14)	0.5: 棕兰、棕红 0.23: 绿黑、绿红、棕黄、棕灰 (2 × 0.14): 黑/棕、红/橙、黄/绿 0.14: 兰、灰、白黑、白黄	绿	9.27	10.3	122
(2 × 0.5 + 3 × (2 × 0.14) + 4 × 0.14)	0.5: 棕兰、棕红 (2 × 0.14): 黑/棕、红/橙、绿/黄 0.14: 兰、灰、白黑、白黄	绿	7.65	8.5	97.6