


UL CUL 认可号:
E255620

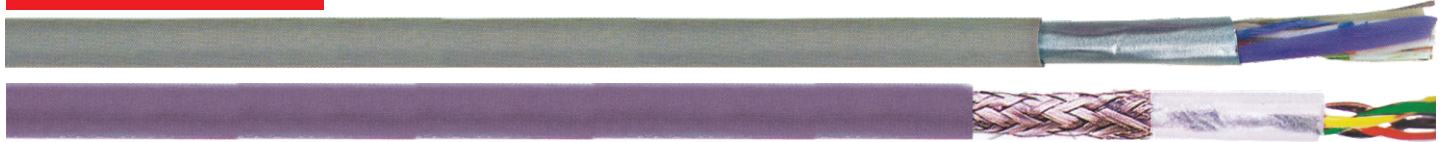

表面印字: E255620 AWM2464 80°C 300V VW-1 x x AWG SHHKW AWM I A 80°C 300V FT-1

应用范围

适用于广播、视听、仪器、电脑等设备的连接线。

APPLICATIONS

For wiring of broadcaster, audio-visual unit, instruments, computers.

电线结构

多股细束绞裸铜丝或镀锡铜丝导体, PVC绝缘、护套;
芯线绞对后绞合成缆, 屏蔽间加地线;
铝箔绕包(单屏蔽), 铝箔绕包加铜丝编织(双屏蔽)。

WIRE MAKE-UP

Multi-stranded fine bare copper/tincopper conductor
PVC insulation, PVC sheath,
aluminum foil wormings (single shield), aluminum foil plus
copper mesh (dual shield)

技术参数

温度范围: 80°C
额定电压: 300V
符合标准: UL 758、1581

TECHNICAL DATA

Operating Temp.: 80°C
Rated Voltage: 300V
Governing Std.: UL 758, 1581

规格 Size 对数 × 芯数 × AWG Pair No. × Core No × AWG	导体结构 Conductor Structure 对数 × 芯数 × 根数/单根直径 Pair No. × Core No. × Cond. No./O.D	标称外径 Nominal O.D. mm	最大外径 Max.O.D. mm	重量(近似) Approx. Weight Kg/Km
(单层屏蔽)				
4 × 2 × 24	4 × 2 × 7/0.203	6.45	6.8	57.5
6 × 2 × 24	6 × 2 × 7/0.203	7.00	7.4	86.5
7 × 2 × 24	7 × 2 × 7/0.203	7.60	8.0	100
8 × 2 × 24	8 × 2 × 7/0.203	7.80	8.2	115
9 × 2 × 24	9 × 2 × 7/0.203	8.40	8.8	150
10 × 2 × 24	10 × 2 × 7/0.203	8.75	9.3	144
15 × 2 × 24	15 × 2 × 7/0.203	10.30	10.9	216
19 × 2 × 24	19 × 2 × 7/0.203	11.30	11.9	270
25 × 2 × 24	25 × 2 × 7/0.203	12.20	12.8	360
50 × 2 × 24	50 × 2 × 7/0.203	17.30	18.1	750
(双层屏蔽)				
2 × 2 × 24	2 × 2 × 7/0.203	6.10	6.5	46.0
3 × 2 × 24	3 × 2 × 7/0.203	6.70	7.1	56.0
4 × 2 × 24	4 × 2 × 7/0.203	7.00	7.4	69.0
5 × 2 × 24	5 × 2 × 7/0.203	7.20	7.6	85.0
6 × 2 × 24	6 × 2 × 7/0.203	7.50	7.9	101
7 × 2 × 24	7 × 2 × 7/0.203	8.10	8.5	118
8 × 2 × 24	8 × 2 × 7/0.203	8.30	8.7	136
10 × 2 × 24	10 × 2 × 7/0.203	9.25	9.8	169
12 × 2 × 24	12 × 2 × 7/0.203	9.80	10.4	200
15 × 2 × 24	15 × 2 × 7/0.203	10.90	11.5	254
18 × 2 × 24	18 × 2 × 7/0.203	11.75	12.5	290
25 × 2 × 24	25 × 2 × 7/0.203	12.65	13.4	424